

# OXWORKS®

## STANDARD PANELS

2400 x 1200mm Panel - Powdercoated  
 38 x 25mm x 1.6mm RHS  
 16mm CHS (1.2mm) Vertical Tubes  
 Pattern may vary

## FIXINGS

38 x 25mm Horizontal Fence Brackets  
 2 Hole - Single Lugged  
 3 x 12-14\*20 Self Tapping Tek Screws  
 used per Fence Bracket

## STANDARD GATES

970 x 1200mm Gate - Powdercoated  
 38 x 25mm Frame (Non-Mitred)

## ALUMINIUM POSTS

50 x 1800 x 1.6mm In Ground Post  
 50 x 2100 x 1.6mm In Ground Post  
 50 x 1300 x 1.6mm Flanged Post  
 50 x 1600 x 1.6mm Flanged Post

- **In Ground Post**  
 200 x 500/600mm Post Hole  
 Hole filled with Post Mix Concrete
- **Core Drilled Post**  
 Minimum 75mm x 100mm Core Drill  
 Hole filled with MP60 Non-Shrink Bostik Grout
- **Flanged Post - On Slab**  
 M10 x 75mm Galvanised Dyna Bolt
- **Flanged Post - On Timber**  
 14 x 75mm Hex Head Batten Screw  
 into Structural timber

## MATERIALS

6063 T6 Aluminium - Powder Coated  
 All of our Garden Fencing styles are  
 available in the Interpon Powder Coating  
 Colour Range

NB: All measurements have a manufacturing  
 tolerance of +/- 2mm




TITLE: **ALUMINIUM GARDEN FENCING  
 COOKTOWN**

CONTACT: [sales@oxworks.com.au](mailto:sales@oxworks.com.au)




[oxworks.com.au](http://oxworks.com.au) 1300 336 237



**HIGHER CUSTOM PANELS** - Custom panels 1500mm High and above will have an extra rail **1200mm down from the top** of the panel. If you require the extra rail positioned elsewhere, please let our sales staff know at the time of quoting.

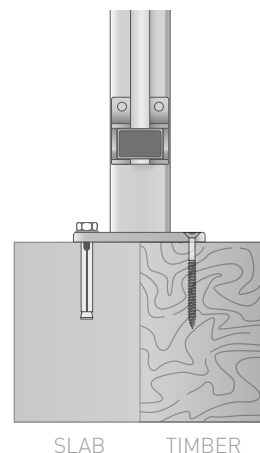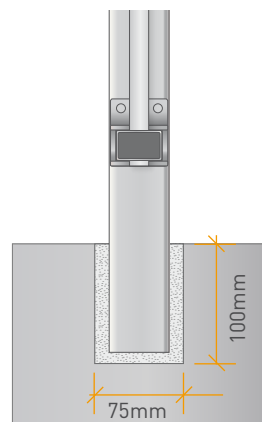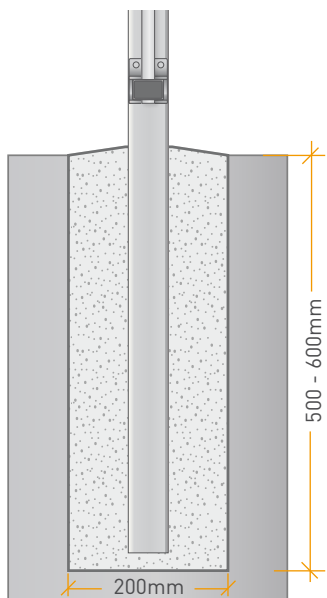

**WELDED  
 BASE PLATE**  
 100 x 100mm  
 11mm HOLES  
 REFER TO NOTES

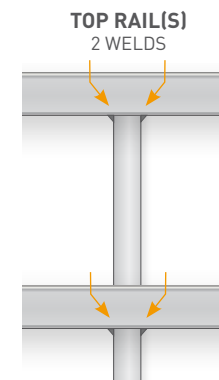

**WELD DETAILS**

**IN GROUND POST DETAIL**

**CORE DRILL POST DETAIL**

**FLANGED (ON SLAB) POST DETAIL**

**WELD DETAILS**