

# OXWORKS®

## STANDARD PANELS

2400 x 1200mm Panel - Powdercoated  
 38 x 25mm x 1.6mm RHS  
 16mm CHS (1.2mm) Vertical Tubes  
 Fleur De Lys 'J' Male Spear  
 Pattern may vary

## FIXINGS

38 x 25mm Horizontal Fence Brackets  
 2 Hole - Single Lugged  
 3 x 12-14\*20 Self Tapping Tek Screws  
 used per Fence Bracket

## STANDARD GATES

970 x 1200mm Gate - Powdercoated  
 38 x 25mm Frame (Non-Mitred)

## ALUMINIUM POSTS

50 x 1800 x 1.6mm In Ground Post  
 50 x 2100 x 1.6mm In Ground Post  
 50 x 1300 x 1.6mm Flanged Post  
 50 x 1600 x 1.6mm Flanged Post

- **In Ground Post**  
 200 x 500/600mm Post Hole  
 Hole filled with Post Mix Concrete
- **Core Drilled Post**  
 Minimum 75mm x 100mm Core Drill  
 Hole filled with MP60 Non-Shrink Bostik  
 Grout
- **Flanged Post - On Slab**  
 M10 x 75mm Galvanised Dyna Bolt
- **Flanged Post - On Timber**  
 14 x 75mm Hex Head Batten Screw  
 into Structural timber

## MATERIALS

6063 T6 Aluminium - Powder Coated  
 All of our Garden Fencing styles are  
 available in the Interpon Powder Coating  
 Colour Range

NB: All measurements have a manufacturing  
 tolerance of +/- 2mm


TITLE: **ALUMINIUM GARDEN FENCING  
 MACKAY**

CONTACT: [sales@oxworks.com.au](mailto:sales@oxworks.com.au)


[oxworks.com.au](http://oxworks.com.au) 1300 336 237




**HIGHER CUSTOM PANELS** - Custom panels 1500mm High and above will have an extra rail **1200mm down from the top** of the panel. If you require the extra rail positioned elsewhere, please let our sales staff know at the time of quoting.

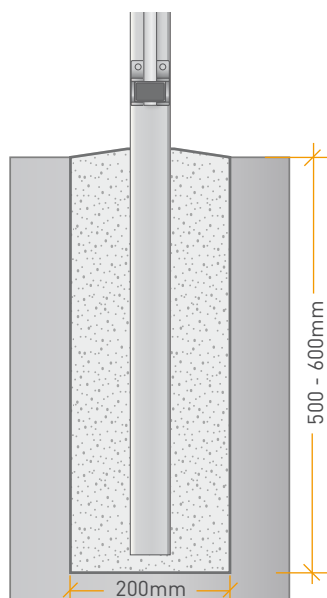

IN GROUND POST DETAIL

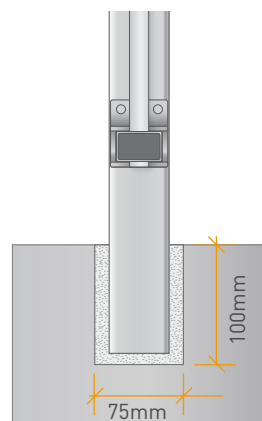


CORE DRILL POST DETAIL

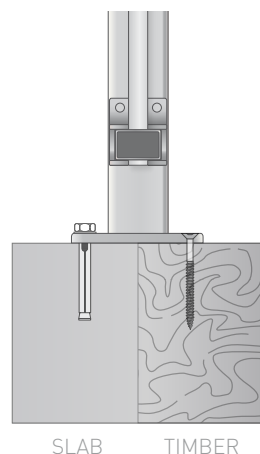


FLANGED (ON SLAB) POST DETAIL


**WELDED  
 BASE PLATE**  
 100 x 100mm  
 11mm HOLES  
 REFER TO NOTES



**TOP RAIL(S)**  
 2 WELDS



**BOTTOM RAIL**  
 2 WELDS



WELD DETAILS